


SPECIFICATION SHEET**JFW MODEL 50T-335****TERMINATION**

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	DC-2200 MHz
Impedance	50 Ohms nominal
Return Loss	35 dB minimum DC-500 MHz 30 dB minimum 500-1000 MHz 21 dB minimum 1000-2200 MHz
RF Input Power	1 Watt average
RF Connector	N male
Physical Size	See outline drawing 092-3578

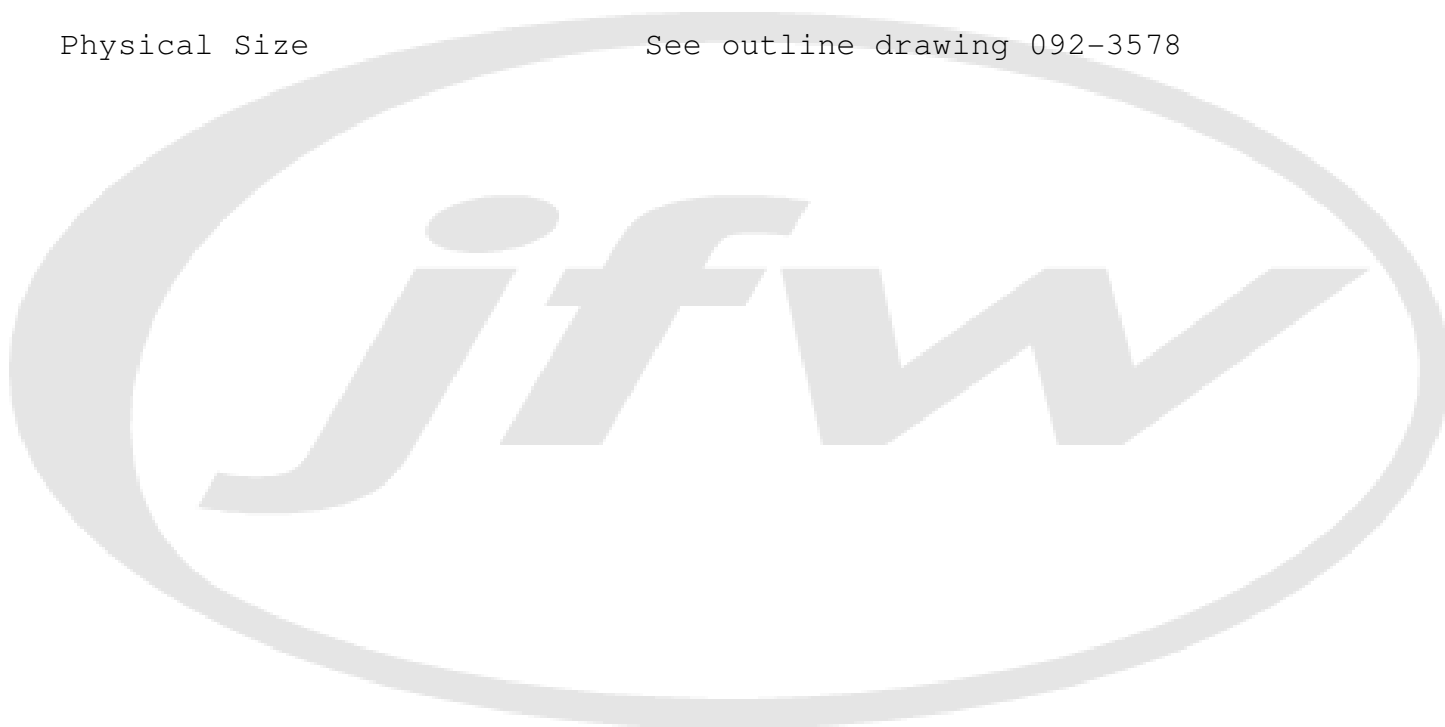

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	02/08/2001			2648	04/02/2001	C	
2585	02/13/2001	A		9999	02/25/2003	D	SL 06/24/2003
2603	02/26/2001	B					